

Modeling of IEEE 802.15.4 in a Cluster of Synchronized Sensor Nodes

Kenji Leibnitz, Naoki Wakamiya, and Masayuki Murata

Graduate School of Information Science and Technology, Osaka University,
1-5 Yamadaoka, Suita, Osaka 565-0871, Japan
E-Mail: [leibnitz,wakamiya,murata]@ist.osaka-u.ac.jp

Abstract. In this paper we present a model of the IEEE 802.15.4 MAC protocol for a cluster of sensor nodes and discuss its performance. Our focus is on a special scenario where all nodes start their transmission synchronously, which is the most harmful case for CSMA/CA protocols. The influence of the cluster size and message length is investigated using a non-stationary analysis technique. We characterize the delays for transmitting/receiving data from the cluster members, the success probability, and discuss energy consumption issues.

Keywords: clustered sensor networks, IEEE 802.15.4, CSMA/CA, energy consumption.

1 Introduction

With the recent developments in Micro Electro Mechanical System (MEMS) technology, large-scale networks of integrated wireless sensor nodes have become available [1]. By deploying networks of sensors, information about behavior, conditions, and positions of entities in an environment are gathered and forwarded to a sink for further processing. The nodes are equipped with a sensing device, radio transmitter, and are usually battery operated. Since they are designed to operate autonomously, they must be able to set up a communication network in an ad-hoc manner and to adapt to changes in the network topology, when individual nodes may fail due to exhausted batteries. Conservation of energy is, thus, a key issue in the deployment of sensor networks. Most energy consumption is caused by the communication over the radio link [2].

Recently, several publications have shown the benefits of using clustering methods in order to prolong the lifetime of the network, e.g. [3, 4]. In clustered sensor networks, the sensor nodes do not transmit their collected data to the sink, but to designated cluster heads which aggregate the data packets and send them directly or via multi-hop communication to the sink. Thus, choosing the appropriate sizes and number of clusters is essential for the performance of the network lifetime. If the cluster's radius is too large, it will host many nodes and energy is wasted due to inter-cluster collisions. On the other hand, if the radius is too small, a large number of clusters is needed to cover the observation area, many of them having a large distance to the sink.

In order to enforce standardization among sensor devices, the ZigBee Alliance [5] was formed in 2002 as an association of companies to create a low-cost and low-power transmission standard for *wireless personal area networks* (WPAN). The ZigBee specification defines the communication on the network layer and above, while the IEEE 802.15.4 standard [6] is adopted for the physical and *medium access control* (MAC) layers. On MAC layer, access to the channel is controlled with a *carrier sense multiple access with collision avoidance* (CSMA/CA) algorithm that is especially designed for WPAN. Different network topologies, such as star-shaped and peer-to-peer, are supported. Recently, there has been a growing number of publications dealing with the performance of IEEE 802.15.4, e.g. [7–9]. However, most papers use simulation studies or analytical evaluation of CSMA/CA considering the system to operate under steady state conditions. Our focus in this paper is on an application in which the transmission instants of each node are synchronized, i.e., all nodes simultaneously initiate their transmission attempt. This specific scenario is highly non-stationary and very harmful for CSMA/CA as shown in [10] for IEEE 802.11 Wireless LAN.

In this paper we present an analytic model of IEEE 802.15.4 CSMA/CA in a cluster of sensor nodes. Our main interest is on the transmission delay and the resulting energy consumption due to the MAC protocol. The purpose of this study is to provide a model for evaluating cluster-based methods. In some clustering models the unrealistic assumption can be found that a node operates with several different MAC protocols. In our paper, a sensor node uses only the ZigBee protocol stack, which we will describe in Section 2. This is followed in Section 3 by the analytical model of the CSMA/CA protocol, from which we derive the delay distribution depending on the number of nodes in a cluster and the message length. In Section 4, we investigate the effects of the parameter settings on the energy consumption. Finally, this work is concluded by a brief outlook on future work.

2 System Description of the Sensor Network

The IEEE 802.15.4 standard aims at low rate wireless personal area networks. Therefore, the requirements on operation and power consumption differ from that of other CSMA/CA-based MAC protocols, e.g. IEEE 802.11 for WLAN.

2.1 The IEEE 802.15.4 MAC Protocol

The MAC protocol can operate in two modes: *beacon-enabled* or *beacon-less* mode. Both modes use discrete time slots. In the beacon-enabled mode, superframes consisting of 16 slots are used. The first part of the superframe is the *contention access period* in which CSMA/CA is employed. Up to 7 guaranteed time slots at the end of the superframe may be used for the *contention free period* that are dedicated to nodes requiring low latency. The acknowledgment of packets is not strictly required and unlike WLAN an RTS/CTS mechanism is not used. In the following we will assume the beacon-less mode with CSMA/CA operating according to the algorithm given in Fig. 1.

The time axis is discretized into *backoff units*, each with duration of 20 symbol periods. We consider the network to operate in the 2.4 GHz frequency band with a symbol rate of 62.5 ksym/s, i.e., a backoff unit has a length of 80 bits. The variable BE denotes the *backoff*

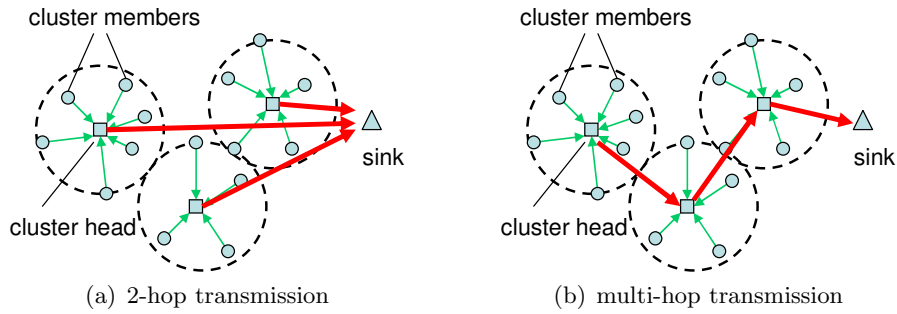


Fig. 2. Clustered sensor networks

attempts to access the channel, and (ii) the computation of the transmission delay. Our focus lies on the impact of two specific input parameters, the number of nodes N in a cluster and the message length L discretized in backoff units.

3.1 Derivation of the Attempt Probabilities

Let us assume an arbitrary node in a cluster of N nodes in total. The *backoff duration* B_k at the k -th backoff is chosen uniformly between 0 and $W_k - 1$ and the total number of backoffs is limited by M .

$$W_k = 2^{\min(BE_{min}+k, BE_{max})} \quad 0 \leq k \leq M \quad (1)$$

B_k is a uniform random variable and its distribution is given by Eqn. (2). The *total attempt duration* D_k at the k -th backoff consists of the sum of all $B_j, j \leq k$, given in Eqn. (3).

$$b_k(t) = \Pr[B_k = t] = \frac{1}{W_k} \quad (2)$$

$$d_k(t) = \Pr[B_0 + B_1 + \dots + B_k = t] = b_0(t) \otimes b_1(t) \otimes \dots \otimes b_k(t) \quad (3)$$

The probabilities in Eqn. (2) and (3) are defined for $0 \leq t \leq t_k = \sum_{j=0}^k W_j$ and “ \otimes ” denotes the discrete convolution operator.

The number of backoffs prior to a successful transmission is expressed by the random variable Q . Let ξ be the probability that the channel is found busy while attempting transmission. After comparison with simulation results, we found that approximating q_k as pmf of Q with a binomial distribution yielded better results than a using a geometric distribution. The approximation for ξ is given by the term in Eqn. (4) where $E[W]$ is the average over all backoff window sizes.

$$q_k = \binom{M}{k} \xi^k (1 - \xi)^{M-k} \quad \xi = \min \left\{ 1, \frac{L(N-1)}{E[W]} \right\} \quad (4)$$

The *attempt probability* $a(t)$ for a node attempting a transmission at time slot t is given by the sum over all $d_k(t)$. Furthermore, the probability of aborting the transmission attempt is defined as $\eta(t) = d_M(t) \xi$.

$$a(t) = \sum_{k=0}^M d_k(t) \quad (5)$$

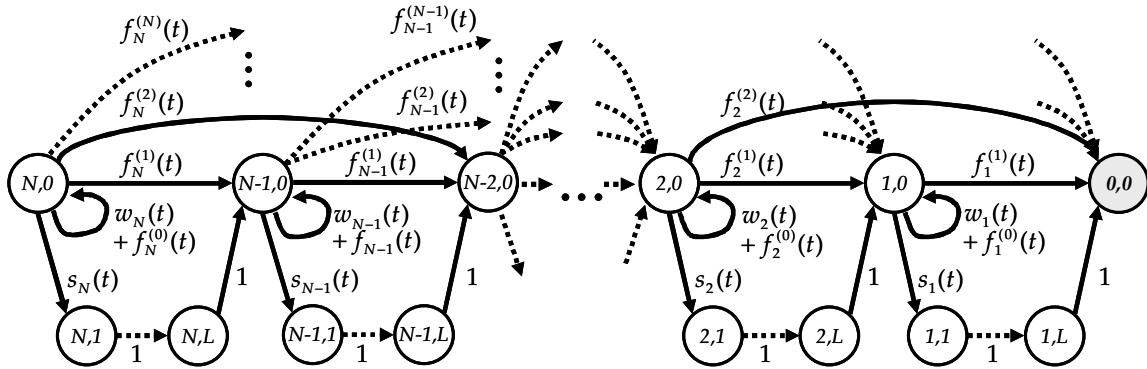


Fig. 4. State space with transition probabilities at time t

All transition probabilities are time-dependent and are formulated with the help of the attempt probability in Eqn. (5). A successful transmission is described by $s_i(t)$ when only a single of the remaining i nodes can successfully access the free channel at time t . The probability for remaining in state $x_{i,0}$ is given in Eqn. (7) as $w_i(t)$ when none of the i remaining nodes accesses the channel. Note that we define $w_0(t) = 1$ as a special case. The remaining probability constitutes the probability of collision $c_i(t)$. Of all the nodes involved in a collision, some will abort their transmission due to reaching the maximum number of backoffs. As there can be multiple simultaneous failures, we model these transitions with a binomial distribution for $0 \leq i \leq k$, see Eqn. (8).

$$s_i(t) = i a(t) (1 - a(t))^{i-1} \qquad w_i(t) = (1 - a(t))^i \qquad (7)$$

$$c_i(t) = 1 - s_i(t) - w_i(t) \qquad f_i^{(k)}(t) = c_i(t) \binom{i}{k} \eta(t)^k (1 - \eta(t))^{i-k} \qquad (8)$$

The attempt probabilities are time-dependent, therefore, we must perform a non-stationary analysis technique by using the simple power method. We start with an initial probability vector $\mathbf{x}(0)$ and iteratively multiply the state vector

$$\mathbf{x}(t) = [x_{0,0}(t), x_{1,L}(t), \dots, x_{1,1}(t), x_{1,0}(t), \dots, x_{N,L}(t), \dots, x_{N,1}(t), x_{N,0}(t)]$$

with the time-dependent transition matrix $\mathbf{P}(t)$ until $t = t_M$ is reached.

$$\mathbf{x}(t + 1) = \mathbf{x}(t) \mathbf{P}(t) \qquad (9)$$

We use $\mathbf{x}(0) = [0, \dots, 0, 1]$ as initial probability vector, since at time $t = 0$ there will be N nodes in the system with probability 1. The resulting component values $x_{0,0}(t)$ of the vector $\mathbf{x}(t)$ constitute the cumulative delay probabilities of $\tau_{head}(t)$. Examples of the distribution are illustrated in Fig. 5(a). The pale colored lines show the distributions obtained from simulations. It can be seen that the boldly colored results from the analysis match well with the simulation values.

3.3 Probability of Success

We are interested in the probability of a transmission attempt being successful until $t = t_M$. Since our Markov model does not distinguish between successful and aborted

terized by the density λ which describes the average number of nodes in a unit area size.

4.1 Basic Energy Consumption Model

We adopt the energy consumption model given in [3] for transmitting and receiving data with length l bits for a transmitter and receiver separation of x .

$$E_{Tx}(l, x) = l (E_{elec} + \varepsilon_{fs} x^2) \qquad E_{Rx}(l) = l E_{elec} \qquad (12)$$

The electronics energy E_{elec} is 50 nJ/bit and $\varepsilon_{fs} = 10$ pJ/bit/m² is the energy for the transmitter amplification in free space. Aggregating data messages consumes $E_{fuse} = 5$ nJ/bit/signal/bit and the energy for sensing requires $E_{sense} = E_{elec}$.

4.2 Energy Consumption per Cluster

The total energy consumption per round in a sensor node cluster usually consists of four parts: (i) the transmission energy of the data from the cluster members to the cluster head, (ii) the reception energy of these data messages at the cluster head, (iii) the energy for fusing and aggregating the received data, and finally (iv) the transmission energy of the aggregated data from the cluster head to the sink/next hop. In this paper we only focus on the effects within a single generic cluster and only roughly take into account the steps (iii) and (iv) as they depend on the specific application and the method of how the clusters are generated. However, it should be remarked that this part greatly influences the overall performance and the model in this paper can be regarded as a tool to analyze each individual case when dealing with a specific clustering method.

In a cluster with N nodes, we sort the nodes by their distance R_n to the cluster head which is given by the Erlang probability density function and its average $E[R_n]$ is expressed with the Euler gamma function in Eqn. (13).

$$r_n(x) = \frac{2(\lambda\pi x^2)^n}{x(n-1)!} e^{-\lambda\pi x^2} \qquad \Rightarrow \qquad E[R_n] = \frac{\Gamma(n + \frac{1}{2})}{\sqrt{\lambda\pi} \Gamma(n)} \qquad (13)$$

The average energy for the n -th node successfully transmitting a message of length l bits to the cluster head is E_{node} . For evaluation of the transmission/reception energy, we consider the success probability given by φ_N , the energy consumption for the unsuccessful nodes only consists of the energy wasted while sensing.

$$E_{node}(n) = C_N E_{sense} + l \varphi_N (E_{elec} + \varepsilon_{fs} E[R_n]^2) \qquad (14)$$

The cluster heads must sense the channel until all nodes have either successfully completed the round or aborted their attempt. They receive S_N messages, which are aggregated to a single message and then transmitted to the sink. We assume that the cluster head is located at distance x from the sink and that no compression takes place, i.e., the aggregated message has a length of $l S_N$. The average energy expended at a cluster head

However, to give detailed results about the energy consumption of a whole sensor network, a specific clustering method and the costs of its energy overhead [12] need to be analyzed in conjunction with the MAC protocol. In the future we wish to investigate these effects and determine the optimal cluster size when the cluster heads employ direct or multi-hop transmission to the sink. With this paper a framework to facilitate the analysis of clustered sensor networks operating with IEEE 802.15.4 CSMA/CA is provided.

Acknowledgments

The first author would like to thank Michael Menth for the discussions on the model in [10]. This research was supported by “The 21st Century COE Program: *New Information Technologies for Building a Networked Symbiosis Environment*” and a Grant-in-Aid for Scientific Research (A)(2) 16200003 of the Ministry of Education, Culture, Sports, Science and Technology in Japan.

References

1. Akyildiz, I., Su, W., Sankarasubramaniam, Y., Cayirci, E.: A survey on sensor networks. *IEEE Communications Magazine* **40** (2002) 102–114
2. Ye, W., Heidemann, J., Estrin, D.: An energy-efficient MAC protocol for wireless sensor networks. In: *IEEE INFOCOM*, New York, NY (2002)
3. Heinzelman, W., Chandrakasan, A., Balakrishnan, H.: An application-specific protocol architecture for wireless microsensor networks. *IEEE Transactions on Wireless Communications* **1** (2002) 660–670
4. Kamimura, J., Wakamiya, N., Murata, M.: Energy-efficient clustering method for data gathering in sensor networks. In: *First Workshop on Broadband Advanced Sensor Networks (BaseNets)*, San Jose, CA (2004)
5. ZigBee Alliance. (<http://www.zigbee.org/>)
6. IEEE 802.15.4: Wireless Medium Access Control (MAC) and Physical Layer (PHY) Specifications for Low-Rate Wireless Personal Area Networks (LR-WPANs) (2003)
7. Achir, M., Ouvry, L.: Power consumption prediction in wireless sensor networks. In: *ITC Specialist Seminar on Performance Evaluation of Wireless and Mobile Systems*, Antwerp, Belgium (2004)
8. Lu, G., Krishnamachari, B., Raghavendra, C.: Performance evaluation of the IEEE 802.15.4 MAC for low-rate low-power wireless networks. In: *Energy-Efficient Wireless Communications and Networks (EWCN '04)*, Phoenix, AZ (2004)
9. Misic, J., Shafi, S., Misic, V.: Performance of 802.15.4 beacon enabled PAN in saturation mode. In: *Symposium on Performance Evaluation of Computer and Telecommunication Systems (SPECTS)*, San Diego, CA (2004)
10. Foh, C., Zukerman, M.: Performance evaluation of IEEE 802.11. In: *IEEE Vehicular Technology Conference (VTC) Fall*, Atlantic City, NJ (2001)
11. Krishnamachari, B., Estrin, D., Wicker, S.: The impact of data aggregation in wireless sensor networks. In: *Proc. of DEBS '02*, Vienna, Austria (2002)
12. Leibnitz, K., Wakamiya, N., Murata, M., Remiche, M.A.: Analysis of energy consumption for a biological clustering method in sensor networks. In: *Third International Workshop on Measurement, Modelling, and Performance Analysis of Wireless Sensor Networks (SenMetrics)*, San Diego, CA (2005)